

Low-order frequency response model in the application of frequency control

Zheng Gao

Hunan university school of electrical and information engineering, China
 dudu987321@126.com

Keywords: frequency response; load disturbance; generator inertia; reheat time constant

Abstract—This paper introduces a low-order system frequency response model (SFR) model is simplified from other models, which can be used to estimate the frequency response of a large power system, or sudden load disturbance of the island. SFR model is based on the neglecting nonlinear power system of the units equation, which is controlled by the steam turbine generator. This means that the generator inertia and reheat time constant make system average frequency response. In addition, because of the two time constant, the resulting frequency response can be calculated in the closed loop form, which provides a simple and accurate method to estimate the essential characteristics of the system frequency response.

Introduction

Electric power system frequency is one of the important indexes of power quality, which is one of the most important parameters in the power system operation. Power system frequency has a very important impact for power supply equipment and the users of the electric equipment of safety and efficiency. The basic task of the operation of the power system is maintaining the system frequency for planned value, which ensure the frequency deviation no more than the allowable value.

Research on a unified frequency model can be traced back to 70 years ago, common methods is the reference on the model of the Rudenberg[1], who offers a lot of the aspects as the concept of mathematical description. The regional control of frequency analysis method has found in [2]-[3]. [4]-[5] is described in reconnected power grid frequency control simulation and load disturbance on the system frequency influence. [5]-[6] introduced the method of frequency measurement. [7] provide a based on the trend of the DC power system frequency response analysis method. But they are too complex, our strategy is providing a low order model through the typical time constant and speed control to maintain necessary average frequency response in system.

SFR model

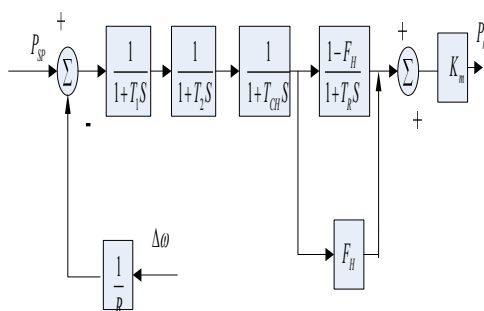


Fig.1. Debugger-turbine model.

If we assume the twice time constants for heat and inertia system, which lead to the change in the first few seconds. So we have reduced order model shows the power plant in figure 2.

P_{SP} = Incremental power P_e = machinery power of Steam turbine P_m = Generator power load power

$P_a = P_m - P_e$ $\Delta\omega$ = Velocity increment F_H = A small part of the HP steam turbine power

T_R = reheat time constant H = Inertia constant D = Damping factor

K_m = gain factor of Mechanical power

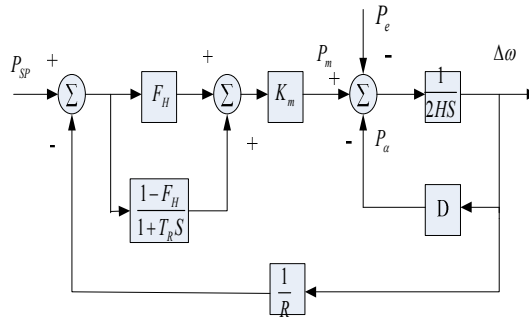


Fig. 2. SFR reduced order model.

$$\Delta\omega = \left(\frac{R\omega_n^2}{DR + K_m} \right) \left(\frac{K_m(1 + F_H T_R S)P_{SP} - (1 + T_R S)P_e}{S^2 + 2\xi\omega_n S + \omega_n^2} \right) \quad (1)$$

$$\omega_n^2 = \frac{DR + K_m}{2HT_R} \quad (2)$$

$$\xi = \left(\frac{2HR + (DR + K_m)T_R}{2(DR + K_m)} \right) \omega_n$$

Obviously, Response characteristics are P_{SP} and P_e although they are different symbols, they have the same form. In many studies, we call the value of P_e (when $P_{SP}=0$) its characteristic is sudden load disturbance. Simplified system as shown in figure 3.

We can define disturbance power as input variables of the new system.

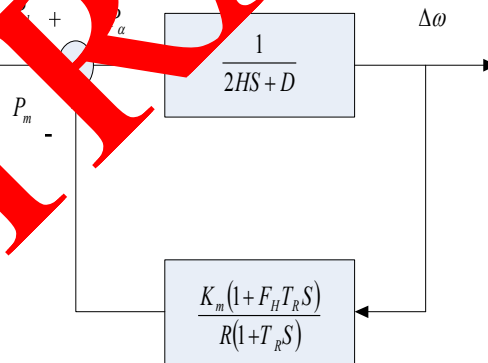


Fig. 3. Input of simplified SFR model in the disturbance.

$P_d > 0$ generator power suddenly increased

$P_d < 0$ the load power suddenly increased

(3)

So we can conclude, frequency response

$$\Delta\omega = \left(\frac{R\omega_n^2}{DR + K_m} \right) \left(\frac{(1 + T_R S)P_d}{S^2 + 2\xi\omega_n S + \omega_n^2} \right) \quad (4)$$

For sudden disturbance, we usually have such calculations for P_d

$$P_d(t) = P_{step} u(t) \quad (5)$$

P_{step} is a unit step function based on S_{SB} and $u(t)$. In the Laplace,

$$P_d(s) = \frac{P_{step}}{s} \quad (6)$$

The above formula can be calculated into (4),

$$\Delta\omega = \left(\frac{R\omega_n^2}{DR + K_m} \right) \left(\frac{(1 + T_R S)P_{step}}{S(S^2 + 2\xi\omega_n S + \omega_n^2)} \right) \quad (7)$$

In the form of time domain for above equation,

$$\Delta\omega = \frac{RP_{step}}{DR + K_m} [1 + \alpha e^{-\xi\omega_n t} \sin(\omega_r t + \Phi)] \quad (8)$$

$$\alpha = \sqrt{\frac{1 - 2T_R \xi \omega_n + T_R^2 \omega_n^2}{1 - \xi^2}} \quad (9)$$

$$\omega_r = \omega_n \sqrt{1 - \xi^2} \quad (9)$$

$$\Phi = \Phi_1 - \Phi_2 = \tan^{-1} \left(\frac{\omega_r T_R}{1 - \xi \omega_n T_R} \right) - \tan^{-1} \left(\sqrt{\frac{1 - \xi^2}{-\xi}} \right) \quad (10)$$

Standardizations

We bring all the unit into a single large units, representing all units in the same system, so we can list the following equations:

$$\sum_i 2H_i S \Delta\omega = \sum_i P_{mi} - \sum_i P_{ei} \quad (11)$$

$$\sum_i P_{GVi} = \sum_i P_{SPi} - \sum_i \left(\frac{1}{R_i} \right) \Delta\omega \quad (12)$$

$$(1 + T_R S) \sum_i P_{mi} = K_m (1 + F_H T_R S) \sum_i P_{GVi} \quad (13)$$

We assume that all equation based on common system S_B

$$S_{SB} = \sum_i^n S_{Bi} \quad (14)$$

So from (11) - (13) ,

$$\frac{S_B}{S_{SB}} \sum_i 2H_i S \Delta\omega = \frac{K_m (1 + F_H T_R S)}{(1 + T_R S)} \left[\frac{S_B}{S_{SB}} \sum_i P_{SPi} - \frac{S_B}{S_{SB}} \sum_i \left(\frac{1}{R_i} \right) \Delta\omega \right] - \frac{S_B}{S_{SB}} \sum_i P_{ei} \quad (15)$$

K_m is a kind of effective unchanged gain parameters, which has relations with general mechanical power on pressure-regulating valve. This parameter affects the system power factor and spinning reserve, as follows:

$$K_m = \frac{P_{inMW}}{S_{SB}} = \frac{1}{S_{SB}} \sum_i P_{mi} = (1 - f_{SR}) = F_R (1 - f_{SR}) \quad (16)$$

F_R = Power factor f_{SR} Capacity factor on spinning reserve

Example

A The System Of the Equivalent System Response

It is very effective to examine the results of the transient response through several important parameters. From the equation (8), we can calculate the slope of the response.

$$\frac{d\Delta\omega}{dt} = \frac{\alpha \omega_n R P_{step}}{DR + K_m} e^{-\xi \omega_n t} \sin(\omega_r t + \Phi_1) \quad (17)$$

We care about two values as follows. the first one is when $t=0$, corresponding is the biggest slope value, and when slope is 0, corresponding is the largest frequency deviation.

1 $t=0$

$$\left. \frac{d\omega}{dt} \right|_{t=0} = \frac{\alpha R \omega_n P_{step}}{DR + K_m} \sin \Phi_1 = \frac{P_{step}}{2H} \quad (18)$$

$$2 \frac{d\omega}{dt} = 0$$

$$0 = \frac{\alpha R \omega_n P_{step}}{DR + K_m} e^{-\xi \omega_n t} \sin(\omega_r t + \Phi_1) \quad (19)$$

If $\omega_r t + \Phi_1 = n\pi$ in equations (19), We use the parameter of t_z , we can calculate

$$t_z = \frac{n\pi - \Phi_1}{\omega} = \frac{1}{\omega_r} \tan^{-1} \left(\frac{\omega_r T_R}{\xi \omega_n T_R - 1} \right) \quad (20)$$

In figure 4, The initial slope depends on P_{step} and H . If we change the two parameters, the initial slope will change. t_z is not the function of P_{step} , so the biggest frequency deviation occurs in exactly the same time (2.35 s) disturbance.

$$\Delta\omega = \frac{RP_{step}}{DR + K_m} \quad (21)$$

P_{step} and ω are increasing, standardization of values, when $P_{step} = -0.3$, $R = 0.05$,

$$\Delta\omega = \frac{-(0.05)(0.3)}{(1)(0.05) + 0.95} = -0.015$$

So we can deduce the final value

$$\lim_{t \rightarrow \infty} \Delta\omega(t) = \lim_{s \rightarrow 0} s \Delta\omega(s) = \frac{RP_{step}}{DR + K_m} \quad (22)$$

B. High pressure points F_H

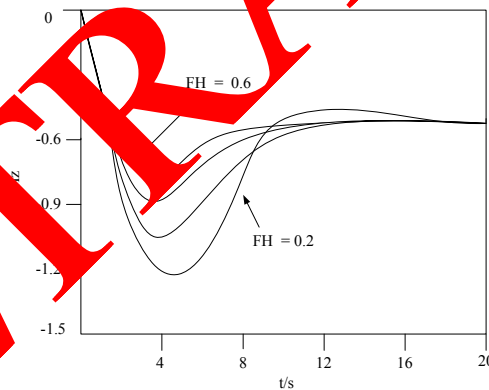


Fig.4..Different value corresponding to frequency response.

F_H is a thermal parameter, which is not rely on the steam turbine. Figure 4 shows different F_H and other parameters in the same figure. Larger F_H , have a remarkable effect on ξ , which can make the system damper ($\xi > 1$). Frequency response can be calculated from (7).

$$\Delta\omega(s) = \frac{T_1 T_2 R \omega_n^2 P_{step}}{DR + K_m} \left(\frac{1 + T_R S}{S(1 + T_1 S)(1 + T_2 S)} \right) \quad (23)$$

Transfer to time domain,

$$\Delta\omega(t) = \frac{T_1 T_2 R \omega_n^2 P_{step}}{DR + K_m} \left(1 + \frac{T_1 - T_R}{T_2 - T_1} e^{-t/T_1} - \frac{T_2 - T_R}{T_2 - T_1} e^{-t/T_2} \right) u(t) \quad (24)$$

Performance analysis and model limitations

For a given system, performance analysis model is easier to use the SFR from a practical system for the disturbance. Droop characteristics R depends on the turbine droop adjustment, which is due to the influence of the value of the governor. Through the observation from steady-state frequency error, it can also be calculated from (21),

$$f_{ss} = \frac{50RP_{step}}{DR + K_m} \text{ HZ} \quad (25)$$

The frequency of the load related

As is known to all, the load of power system is relevant with the system frequency. The method to find the frequency correlation between load is to establish a load model.

$$P_L = P_{L0}(1 + k_f \Delta\omega) \quad (26)$$

The change of incremental load is a function of the change of incremental frequency. The results include the flagging constant $D \Delta P_L = D \Delta\omega$ (27)

The use of the system SFR model in the actual disturbance

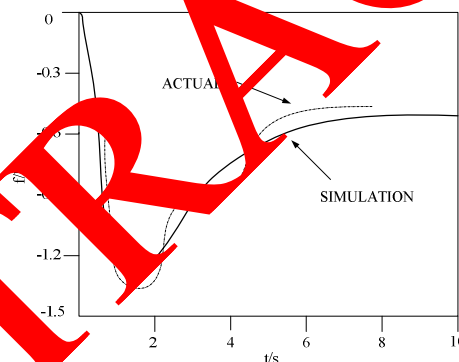


Fig.5.Validation in actual interference model.

In the system, it is easy to calculate the disturbance and the error of steady state frequency and H . Relevant time constant need the experiment and error estimate. The actual system of data SFR proved the validity of the model, in figure 5.

Conclusions

SFR model is a simplify of large disturbance interconnected system, which ignore some time constant. It approximates the performance of system frequency, including the speed regulator and the response of the steam turbine. Although simple of the model, it is still good, compared with the actual system. In addition, the model provides a method to detect frequency responses according the different system parameters influence of frequency response, which is difficult to get in high order model.

References

- [1] Reinhold Rudenberg, Transient Performance of Electric Power Systems; Phenomena in Lumped Networks, MIT Press[J], Cambridge, MA, 1967.
- [2] C. Concordia, F. P. deMello, L. K. Kirchmayer, and R. P. Schulz, "Effect of Prime-Mover Response and Governing Characteristics on System Dynamic Performance, Proc. Am. Power Conf, v XXVIII[J], 1966, p 1074-1085.
- [3] C. Concordia, L. H. Fink, and G. Poullickas, "Load shedding on an isolated system," IEEE Trans. Power Syst[J], vol. 10, pp. 1467-1472, 1995.
- [4] Lukas Sigrist, Ignacio Egido and Luis Rouco "Frequency Stability Boundary of Small Isolated Power Systems" 2010 IEEE 26-th Convention of Electrical and Electronics Engineers in Israel.
- [5] H. You, V. Vittal, and Z. Yang, "Self-healing in power systems: An approach using islanding and rate of frequency decline-based load shedding," IEEE Trans. Power Syst, vol. 18, pp. 174-181, 2003.
- [6] P. Kundur, Power System Stability and Control. New York: McGraw-Hill, 1994.
- [7] A.C.B. Delbem¹, E.V. Simos¹, B.F. Souza¹, M. Oleskovicz², S.A. Souza², and J.V. Corry², "A Fast and Efficient Method for Frequency Deviation Measurement Based on Genetic Algorithms using a FPGA Approach"