

Challenges in Syngas Fermentation for Bioethanol Production: Syngas Composition

Rendy Mukti^{1,a}, Tjandra Setiadi^{1,b} and M.T.A.P Kresnowati^{1,2,c*}

¹Department of Chemical Engineering, Institut Teknologi Bandung, Bandung, 40132, Indonesia

²Department of Food Engineering, Institut Teknologi Bandung, Bandung, 40132, Indonesia

^arendy01.mukti@gmail.com, ^btjandra@itb.ac.id, ^ckresnowati@itb.ac.id*

Keywords: Bioethanol, Fermentation, Lignocellulosic biomass, Syngas.

Abstract. Energy challenges in developing countries are more significant if they continue to use fossil materials and impact air quality. Lignocellulosic biomass can be an alternative to new renewable sources to replace fossil materials. Indonesia produces various sources of lignocellulosic biomass, which can be used in multiple energy sources, such as bioethanol. The hybrid pathway is one of the routes for producing bioethanol. The first stage of the hybrid process is the conversion of biomass into CO, CO₂, and H₂ (syngas) gas through the gasification process. Then the syngas is converted into bioethanol through fermentation using microorganisms as biocatalysts. The bioethanol production line is the Wood-Ljungdahl pathway. Factors that affect syngas are the type of biomass (chemical, physical, and morphological properties) and the gasification process (type of gasifier, temperature, gasification agent, and ratio equilibrium (ER)). This paper reviews the challenges in implementing syngas fermentation. In particular, variations in the composition of syngas as a substrate for fermentation.

Introduction

Energy challenges as a fundamental component of economic activity for developing countries are more significantly related to the dependence on dwindling fossil fuel sources and have a negative impact on air quality related to CO₂ emissions produced [1,2]. An alternative to meeting the long-term energy mix, minimizing the use of fossil energy sources, and reducing CO₂ emissions is to use biofuels produced from renewable resources such as biomass [3,4]. Biomass is one of the abundant renewable carbon sources and can be used as an alternative energy source to replace fossil fuels [5–7]. The advantage of using plant-based biofuels in the transportation sector is that it can reduce greenhouse gas emissions because the CO₂ content produced from the combustion process will be bound by plants for the photosynthesis process so that the CO₂ content does not increase in the atmosphere [3,8]. In addition, biomass is more efficient if converted into liquid fuels such as ethanol [9]. Raw materials in the manufacture of bioethanol can be sourced from the first-generation (starch-based raw materials), second-generation (lignocellulosic biomass), or third-generation (algae raw materials) [10–12].

Generally, there are three routes for bioethanol production: biochemical, thermochemical, and hybrid. The hybrid pathway combines thermochemical and biochemical processes: biomass is transformed into syngas through the gasification process, and then the syngas is fermented into short-chain organic acids and alcohols such as ethanol by acetogenic bacteria [13,14]. The syngas fermentation process offers an advantage over the chemical catalytic process in that the microorganisms can work in the presence of some impurities in the syngas and are flexible to the H₂/CO ratio [13]. In addition, the process conditions, such as temperature and pressure required in the fermentation process, are lower than the chemical process, reducing operating costs [13,15]. The characteristics of syngas as the output of biomass gasification maybe affected by various factors which further may also affect the performance of the syngas fermentation process. It is the goal of this paper to review the factors affecting the characteristics of syngas and the corresponding effects on the syngas fermentation performance.

Lignocellulosic Biomass

Lignocellulosic biomass can be obtained from agricultural residues, forest residues, and post-harvest processing [16,17]. Lignocellulosic biomass has the main components, namely cellulose ($(C_6H_{10}O_5)_n$) and hemicellulose ($(C_5H_8O_4)_m$) that may compose up to 60-80% of biomass, and lignin ($(C_9H_{10}O_3(OCH_3)_{0.9-1.7})_y$) that may compose up to 10-25%, and minerals [12,18,19]. The selection of lignocellulosic biomass is essential because significant differences in the biomass chemical, physical, and morphological properties will affect the syngas composition [19,20]. High carbon and oxygen content in biomass can produce a higher percentage of combustibles in syngas [21]. The water content of more than 30% reduces the calorific value of syngas because the energy consumed is used to remove water content; besides that, the humidity will inhibit changes in the oxidation temperature of the gasifier so that it can increase the tar content [22]. The high ash and mineral content causes the formation of slag, which causes obstacles to biomass feed to the gasifier [23]. The larger the size of the biomass feed will reduce the reaction surface, thereby inhibiting mass and heat transport for the downdraft gasifier [24,25].




Gasification

Gasification is a thermochemical conversion process technology for energy production that has been used for a long time; conventionally, the raw materials used are fossil-based such as coal and natural gas, but other alternative raw materials that can be used are biomass, municipal solid waste (MSW), and plastic [26,27]. The advantages of biomass compared to fossil sources in the gasification process are that it contains less nitrogen, sulfur, and heavy metals, lower gasification temperature, lower pollutant emissions, and higher reactivity [28,29].

The gasification process is drying, pyrolysis, oxidation, and reduction [24]. Drying, this process is carried out at a temperature of 100-200 °C until the water content reaches 10% to 20% [24]. As a result, energy efficiency is increased, and syngas quality is improved by reducing the moisture content [30]. Pyrolysis occurs without air, gas, or other gasification media, which causes the breakdown of hydrocarbon molecules into smaller gas molecules, tar, and leaves solid carbon biomass [31]. Pyrolysis occurs at a temperature of 200-700 °C [32]. Oxidation is a reaction between solid biomass and oxygen from agent gasifying and biomass to form CO_2 , CO , and H_2O , formed from hydrogen in oxidation biomass [24]. The oxidation of carbon and hydrogen is an exothermic reaction that produces a large amount of heat. When oxygen is available in sufficient stoichiometric quantities, partial carbon oxidation will occur, forming carbon monoxide [24]. The reactions that occur in the oxidation process are as follows:



Reduction occurs when there is little oxygen in the system, a reduction reaction occurs in the temperature range of 800 – 1000 °C [33]. The reaction is as follows:



Gasification conditions affect the performance of the gasification process, such as the gasifier type, temperature, gasification agent (air, O_2 , or steam), and the equivalent ratio of supplied air demand to stoichiometry (ER) [27,28,34]. The ER represents the real air-to-biomass ratio in terms of stoichiometry [35]. There are three gasifier types categories: Fixed Bed, Fluidized Bed, and entrained flow. Fixed bed types include downdraft gasifiers, and updraft gasifiers, while fluidized bed types include circulating fluidized bed gasifiers and bubbling bed gasifiers [36]. A fixed bed gasifier is the simplest gasifier, with long solid residence time, low gas velocity, biomass that does not need to be

uniform, and low dust (ash) content [37]. The disadvantages of fixed bed gasifiers are that they produce high tar content and operate at high temperatures due to the biomass size [38]. Fluidized bed gasifiers are suitable for large-scale biomass gasification because the mixing and uniform temperature result in increased carbon conversion and are the most widely used for biomass gasification today [39].

The higher temperature in the gasification process causes an increase in the calorific value of syngas because the high temperature is suitable for the oxidation process and produces less tar, but if the temperature is too high, the gasifier will crack faster [40,41]. In addition, the type of gasifier agent affects the composition of the syngas, and if the air is used as a gasifying agent, it will produce nitrogen compounds in the syngas, which is higher when compared to the gasifying agent of steam or oxygen [42].

Gasification converts raw materials into carbon monoxide and other synthetic gases to become fuel gases or other chemicals using gasification agents such as oxygen, steam, or air [22]. The main components of syngas are carbon monoxide (CO), hydrogen (H₂), and carbon dioxide (CO₂). In addition, it may contain other gases such as water (H₂O), ammonia (NH₃), nitrogen oxides (NO_x), methane (CH₄), ethene (C₂H₄), ethane (C₂H₆), ethine (C₂H₂), benzene (C₆H₆), naphthalene (C₁₀H₈), hydrogen cyanide (HCN), sulfur dioxide (SO₂), hydrogen sulfide (H₂S), carbonyl sulfide, and condensable volatiles [15]. Impurities from the gasification process include tar and particulates [43]. The composition of syngas from various biomass and variations in gasification operating conditions can be seen in Table 1.1. Overall, the composition of syngas may be effected by the the types of biomass used as the raw materials, the types of gasifier, the types of gasification agent, and the applied ER.

Table 1.1 The composition of syngas from biomass gasification

Gasifier	Biomass	ER	Gasification agent	Temp (°C)	Composition (%volume Dry)					Ref
					CO	H ₂	CO ₂	CH ₄	N ₂	
Fluidized bed	Wood Chips	0.3	Air	800	18.0	13.2	11.5	4.1	41.1	[44]
		0.3	O ₂		35.7	27.9	10.5	0.76	0.9	
		n/a	Steam		14.0	31.1	14.1	7.3	0.0	
		n/a	Steam (dry)		18.5	41.0	18.6	9.7	0.06	
Fluidized bed	Cypress sawdust	0.54	Air	700-800	6.9	5.6	18.1	1.4	68.0	[45]
	Mixed pine bark-spruce	0.22	Air		21.4	5.4	14.7	4.6	53.9	
Bubbling fluidized bed	Rice husk	n/a	Air	702	21.3	4.4	11.3	4.3	57.1	[46]
				737	16.9	4.8	15.9	3.7	57.1	
Fixed bed downdraft	Olive	n/a	Air	1190	17.4	13.2	12.4	9.5	54.9	[47]
	Peach			1170	17.7	15.0	13.5	5.8	51.7	
	Pine			1140	16.0	12.0	11.4	8.9	59.4	

Syngas can be converted through the Fischer-Tropsch (FT) process using a chemical catalyst to produce diesel, methanol, or ethanol [13]. The FT process is generally conducted at high operating temperatures and pressures and requires stable H₂/CO ratios. Gaseous impurities may become toxic during the process [13]. Syngas can also be converted using a microorganism catalyst to alcohols, carboxylic acids [48,49], and 3-butanediol [50].

Syngas fermentation

The production of bioethanol via syngas fermentation offers an advantage when compared to the conventional lignocellulosic hydrolysis followed by sugar fermentation that it can increase product yields from the same amount of raw materials because all biomass components, including lignin, can be converted into syngas in the gasification process. On the other hand, the low solubility of syngas

to fermentation broth may presents as the main challenge for the process [51–54]. Some efforts have been made to address this issue, among others by developing a dedicated fermentor design equipped by a hollow fiber membrane contactor [55].

The syngas fermentation is facilitated by the acetogenic bacteria that can convert CO, CO₂, and H₂ with flexible molar ratios and withstand some impurity gases in syngas [49,56]. Syngas fermentation is a biological process in which CO and CO₂ from syngas are converted to acetyl-CoA with the help of acetogenic bacteria and subsequently to acetic acid, ethanol, and many other products via the Wood-Ljungdahl pathway [57]. The microorganisms used are anaerobic microorganisms which are classified as autotrophic. Autotrophs utilize C1 compounds in syngas, including CO and/or CO₂ as a carbon source and H₂ as an energy source [58].

The Wood-Ljungdahl pathway reduces CO₂ to CO and formic acid or directly to formyl groups. The formyl group is reduced to a methyl group and then combined with carbon monoxide and co-enzyme A to produce acetyl-CoA [59]. This path can be seen in Fig.1.

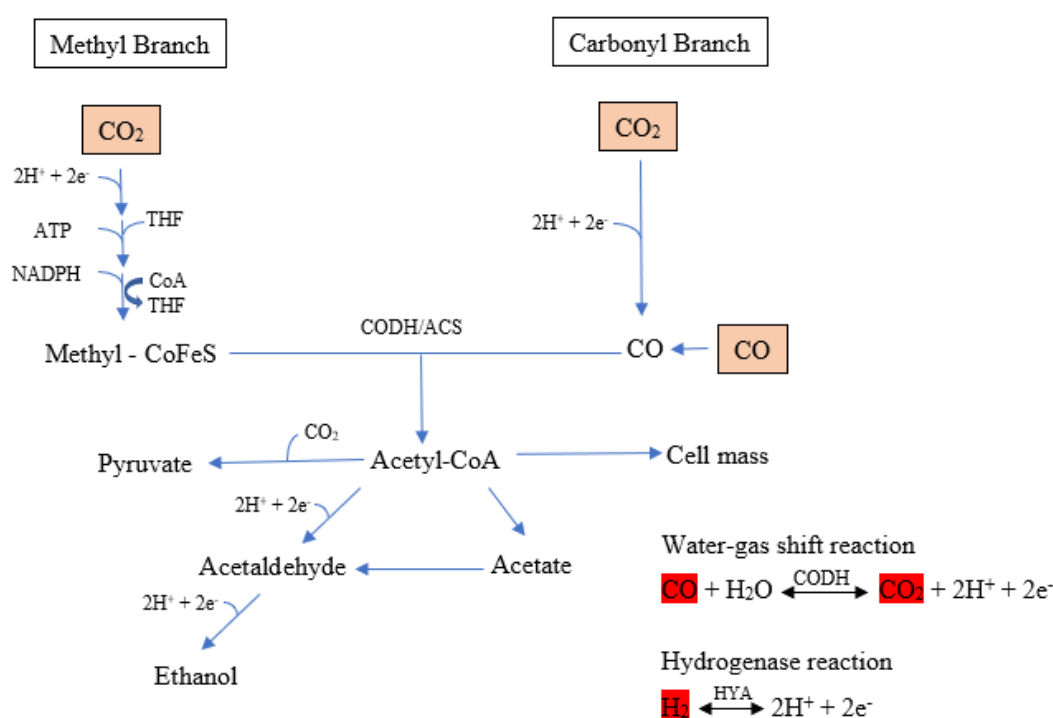


Fig.1 Wood – Ljungdahl Pathway [9,15,49]

The initial step before the WLP process is to convert 1 mole of H₂ into 2 moles of reducing agent [H] by the enzyme hydrogenase (HYA). Meanwhile, a water-gas shift reaction converts one mole of CO and H₂O into CO₂ and 2 moles of reducing agent [H] by carbon monoxide dehydrogenase (CODH). The reducing equivalent [H] is used to fix carbon molecules from CO and CO₂ into cell biomass and other metabolites via WLP. [60,61]. There are two main steps in the formation of acetyl-CoA. The first step is to reduce CO₂ in the methyl group through several reduction reactions using several enzymes.

In contrast, in the carbonyl group, CO₂ compounds are reduced to CO using the carbon monoxide dehydrogenase (CODH) enzyme. In the second step, the methyl and carbonyl groups are combined with the enzyme acetyl-CoA synthase (ACS) and carbon monoxide dehydrogenase (CODH) to produce acetyl-CoA. Then form acetic acid and ethanol. Some acetyl-CoA is used to create microbial cell mass [62].

Syngas Fermentation Conditions

The syngas fermentation process is influenced by the type of microorganism, bioreactor type, syngas composition, and gas-liquid mass transfer [63].

Types of microorganisms. The microorganisms used for ethanol production are *Clostridium ljungdahl*, *Clostridium autothenogenum*, *Clostridium ragsdellai*, and *Alkalibaculum bacchi* [15]. *C. ljungdahl* energy sources are H_2 and CO_2 or CO , whereas *C. autothenogenum* uses CO as the only source of carbon and energy [64]. *Alkalibaculum bacchi* will produce more ethanol if the CO composition is greater [65].

Bioreactor type. Bioreactors with a high reaction surface area will support a high mass transfer ratio and get a high syngas conversion [56]. Bubble diameter will be one of the critical parameters in gas-liquid mass transfer in suspended growth bioreactors [56]. Several reactors used in the production of ethanol are stirred tank bioreactor (STB), Bubble column reactor (BCR), Trickling bed reactor (TBR), Moving bed biofilm reactor (MBBR), and membrane bioreactor (MBR) [56]. STB uses mechanical stirring to reduce bubbles, BCR, which is applied in the process, does not use a stirrer but makes the syngas stay longer in the reactor, TBR is a reactor design with the main influencing parameters, there is the size of the reactor gasket, liquid recirculation rate, and gas flow rate, MBBR is a reactor where microbes grow on the surface of certain media then form a biofilm layer that increases mass transfer [66]. One type of MBR is a hollow filter membrane bioreactor (HFMR) which can produce micro solid bubbles [67]. The maximum concentration of ethanol obtained was more significant when using STR with HFM, which was 1.09 g/L compared to 0.35 g/L without HFM [55].

Gas-liquid Transfer mass. Gas-liquid mass transfer is needed to balance the kinetic needs of the cell without inhibiting metabolism so that the fermentation process can run efficiently [68]. The limited mass transfer causes a reduction in the availability of substrate for the growth of microorganisms in the growth medium [69]. The solubility of syngas in the fermentation broth will affect the availability of substrate for the growth of microorganisms in the medium [70]. The volumetric mass transfer coefficient (K_{La}) is often used to measure the solubility of gases in the liquid phase [71]. The K_{La} for CO , CO_2 , and H_2 gases are respectively 300.5, 425.9, and 277.1 $hour^{-1}$ [72]. Simulations were carried out to calculate the utilization of CO and CO_2 with the utilization of CO and CO_2 of 0.92 mol and 2.03 mol with a consumption rate of 5.15 g/L-day and 17.87 g/L-day resulting in the conversion rate of dissolved CO in the fermentation broth is 23% while the dissolved CO_2 in the fermentation broth is 100% because the solubility of CO_2 is more significant than CO [72,73].

Effect of Impurity Gases in Syngas. Overall, the syngas fermentation process is said to be more resistant to the presence of impurities in the syngas than the chemical catalytic process [63]. However, the literature also mentioned that some impurities could inhibit the activity of acetogenic bacteria even at low concentrations by limiting enzyme activity and cell growth or by changing physicochemical conditions such as osmolarity, redox potential, pH, etc. [63].

Volatile hydrocarbon compounds such as CH_4 in a concentration of 4.5% did not affect the gas utilization process by *C. carboxidivorans* [74]. In addition, the utilization of the same microbes using syngas containing 0.1% C_2H_2 , 1.4% C_2H_4 , and 0.35% C_2H_6 did not affect growth during the fermentation process [75].

Tar causes inhibition of cell growth until microbial microbes can adapt to tar. In addition, tar can also increase the ratio of ethanol to acetic acid because tar will inhibit the production process of acetic acid [75]. *C. butyricum* can be grown 500 times in a bioreactor using tar-free syngas compared to tar-containing syngas [76]. The conventional technology for separating tar from syngas is the scrubbing system [77]. Filtration can also remove ash, tar, and other particulates from the produced gas [78].

Some species can utilize certain impurities in the syngas fermentation process. NH_3 and H_2S gas can increase the growth and formation of alcohol (ethanol, 1-hexanol, and 1-butanol) during fermentation using *C. carboxidivorans* [79]. These bacteria can withstand NH_3 rapidly turning into ammonium ions (NH_4^+) in the fermentation medium, which causes inhibition of hydrogenase activity and the growth of acetogenic bacterial cells [80].

Nitrogen oxides, nitrates, and nitrites can reduce biomass growth and alcohol concentration during syngas fermentation using *Clostridium carboxidivorans* [81]. In addition, Nitric oxide, which is present in syngas at 150 ppm, inhibits the hydrogenase enzyme that consumes H₂ [75].

The presence of impurities affects the performance of syngas fermentation, it may either improve the ethanol productivity or reduce it. The net effects should be researched further for a specific syngas composition.

Effect of Composition Gas on Syngas Fermentation Process. The carbon source for acetogenic bacteria in the Wood-Ljungdahl is CO or CO₂, which CO₂ can be used as a carbon source in the presence of H₂ [28,63]. The energy source used is CO or H₂ [28,63]. One of the advantages of the fermentation process is that it is flexible to the H₂/CO ratio. Still, acetogenic prefer a low H₂/CO ratio because most organisms grow better on CO than on H₂ [49,82]. H₂ will increase the conversion of CO into organism growth and ethanol production because H₂ acts as a source of electrons [53]. If H₂ is reduced, the source of electrons used is CO; this causes reduced ethanol production because the amount of carbon used is reduced according to the required reducing equivalents [53].

The fermentation process using the microbe *C. ljungdahlii* with an H₂/CO ratio of 2.0 produced acetate of 35.21 mM and ethanol of 5.39 mM, while the H₂/CO ratio of 0.5 produced acetate of 22.64 mM and ethanol of 7.44 mM [83].

According to Henry's law, only a small amount of CO and H₂ are soluble in water, and their solubility depends on the partial pressure of various species [49]. Decreasing the partial pressure of CO from 2.0 to 0.35 atm reduced cell growth and reduced acetic acid to ethanol. In addition, the partial pressure ratio of CO to CO₂ will affect the production of electrons and ATP [84]. CO₂ can also stimulate acetogenesis, the CO:CO₂ ratio of 70:30 increases the concentration of acetic acid compared to only pure CO. The CO₂ produced during the solventogenesis process from CO conversion can be involved in the re(oxidation) of ethanol to acetic acid [85].

However, the microbes normally need some times to different process condition, significant changes in the gas composition may affect the performance of the fermentation. The time required by *C. ljungdahl* to reach the maximum cell concentration with a syngas composition 55% CO, 30% H₂, 5% CO₂, and 10% Ar for 20 hours [86], while with a syngas composition of 25% CO, 15% H₂, 20 CO₂ and 40% N₂ it takes 72 hours [55]. On the other hand, due to process instability, the composition of syngas produced during the gasification process has changed in a certain range. Therefore, it becomes a challenge in the fermentation process.

Conclusion

The combination of the thermochemical-biological process to convert lignocellulosic biomass into bioethanol is the gasification of lignocellulosic biomass into syngas followed by fermentation of syngas into bioethanol is an emerging technology. The biomass type and the gasification process conditions will affect the gas composition and the resulting impurities, such as tar. These factors may affect fermentation performance and the corresponding bioethanol productivity. Further research needs to be conducted to address these problems.

References

- [1] OECD. OECD Green Growth Studies. D. 2012;104.
- [2] Twas. Sustainable energy for developing countries. SAPI EN S Surveys and Perspectives Integrating Environment and Society [Internet]. 2008;2.1:1–48. Available from: <http://sapiens.revues.org/823%5Cnwww.twas.org>
- [3] Naik SN, Goud V v., Rout PK, Dalai AK. Production of first and second generation biofuels: A comprehensive review. Renewable and Sustainable Energy Reviews. 2010;14:578–97.
- [4] Osamu K CH. Biomass Handbook. Gordon Science Publisher. 1989;

-
- [5] Bharadwaj Kummamuru. WBA Global Bioenergy Statistics 2017. World Bioenergy Association [Internet]. 2017;80. Available from: http://www.worldbioenergy.org/uploads/WBA_GBS_2017_hq.pdf
- [6] Alonso DM, Bond JQ, Dumesic JA. Catalytic conversion of biomass to biofuels. *Green Chemistry*. 2010; 12: 1493–513.
- [7] Huber GW, Iborra S, Corma A. Synthesis of transportation fuels from biomass: Chemistry, catalysts, and engineering. *Chem Rev*. 2006;106:4044–98.
- [8] Rutz D. Feedstock Production. *BioFuel Technology Handbook*. 2007;72.
- [9] Liew FM, Martin ME, Tappel RC, Heijstra BD, Mihalcea C, Köpke M. Gas Fermentation-A flexible platform for commercial scale production of low-carbon-fuels and chemicals from waste and renewable feedstocks. *Front Microbiol*. Frontiers Media S.A.; 2016.
- [10] Pauly M, Keegstra K. Cell-wall carbohydrates and their modification as a resource for biofuels. *Plant Journal*. 2008;54:559–68.
- [11] Sánchez C. Lignocellulosic residues: Biodegradation and bioconversion by fungi. *Biotechnol Adv* [Internet]. Elsevier Inc.; 2009; 27: 185–94. Available from: <http://dx.doi.org/10.1016/j.biotechadv.2008.11.001>
- [12] Nanda S, Mohammad J, Reddy SN, Kozinski JA, Dalai AK. Pathways of lignocellulosic biomass conversion to renewable fuels. *Biomass Convers Biorefin*. Springer Verlag; 2014. p. 157–91.
- [13] Griffin DW, Schultz MA. Fuel and chemical products from biomass syngas: A comparison of gas fermentation to thermochemical conversion routes. *Environ Prog Sustain Energy*. 2012;31:219–24.
- [14] Michailos S, Parker D, Webb C. Munich Personal RePEc Archive Design, Sustainability Analysis and Multiobjective Optimisation of Ethanol Production via Syngas Fermentation Design, sustainability analysis and multiobjective optimisation of ethanol production via syngas fermentation. 2017.
- [15] Daniell J, Köpke M, Simpson SD. Commercial biomass syngas fermentation. *Energies (Basel)*. 2012.
- [16] Huber GW, Corma A. Synergies between bio- and oil refineries for the production of fuels from biomass. *Angewandte Chemie - International Edition*. 2007;46:7184–201.
- [17] IsraelGómez-CastroSalvadorHernández C-AG-I. Production processes from lignocellulosic feedstock. 2021;129–69.
- [18] Hakeem KR, Jawaid M, Alothman OY. Agricultural biomass based potential materials. *Agricultural Biomass Based Potential Materials*. 2015;1–505.
- [19] Kalita P, Baruah D. Investigation of Biomass Gasifier Product Gas Composition and its Characterization. *Energy, Environment, and Sustainability*. 2018.
- [20] Parthasarathy P, Narayanan SK. Effect of Hydrothermal Carbonization Reaction Parameters on. *Environ Prog Sustain Energy*. 2014;33:676–80.
- [21] McKendry P. Energy production from biomass (part 2): Conversion technologies. *Bioresour Technol*. 2002;83:47–54.
- [22] McKendry P. Energy production from biomass (part 3): Gasification technologies. *Bioresour Technol*. 2002;83:55–63.
- [23] Mukhopadhyay K. An assessment of a Biomass Gasification based Power Plant in the Sunderbans. *Biomass Bioenergy*. 2004;27:253–64.
- [24] Basu P. Biomass Gasification and Pyrolysis: Practical Design and Theory.

-
- [25] Pérez JF, Melgar A, Benjumea PN. Effect of operating and design parameters on the gasification/combustion process of waste biomass in fixed bed downdraft reactors: An experimental study. *Fuel*. 2012;96:487–96.
- [26] Chan YH, Syed Abdul Rahman SNF, Lahuri HM, Khalid A. Recent progress on CO-rich syngas production via CO₂ gasification of various wastes: A critical review on efficiency, challenges and outlook. *Environmental Pollution* [Internet]. Elsevier Ltd; 2021;278:116843. Available from: <https://doi.org/10.1016/j.envpol.2021.116843>
- [27] Khushboo, Ankush, Yadav K, Mandal MK, Pal S, Chaudhuri H, et al. Bioeconomy of municipal solid waste (MSW) using gas fermentation [Internet]. *Current Developments in Biotechnology and Bioengineering: Resource Recovery from Wastes*. Elsevier B.V.; 2020. Available from: <http://dx.doi.org/10.1016/B978-0-444-64321-6.00015-X>
- [28] D. Ramachandriya K, K. Kundiyana D, M. Sharma A, Kumar A, K. Atiyeh H, L. Huhnke R, et al. Critical factors affecting the integration of biomass gasification and syngas fermentation technology. *AIMS Bioeng*. 2016;3:188–210.
- [29] He Q, Guo Q, Umeki K, Ding L, Wang F, Yu G. Soot formation during biomass gasification: A critical review. *Renewable and Sustainable Energy Reviews* [Internet]. Elsevier Ltd; 2021;139:110710. Available from: <https://doi.org/10.1016/j.rser.2021.110710>
- [30] Patel VR, Patel D, Varia NS, Patel RN. Co-gasification of lignite and waste wood in a pilot-scale (10 kWe) downdraft gasifier. *Energy*. 2017;119:834–44.
- [31] Gómez-Barea A, Leckner B. Modeling of biomass gasification in fluidized bed. *Prog Energy Combust Sci*. 2010;36:444–509.
- [32] Molino A, Chianese S, Musmarra D. Biomass gasification technology: The state of the art overview. *Journal of Energy Chemistry* [Internet]. Elsevier B.V.; 2016;25:10–25. Available from: <http://dx.doi.org/10.1016/j.jechem.2015.11.005>
- [33] Srivastava T. Renewable Energy (Gasification). *Advance in Electronic and Electric Engineering* [Internet]. 2013;3:1243–50. Available from: <http://www.ripublication.com/aeec.htm>
- [34] Murugan PC, Joseph Sekhar S. Investigation on the yield of producer gas from tamarind shell (*Tamarindus Indica*) as feedstock in an ImberLucas, C. (2005). High temperature air/steam gasification of biomass in an updraft fixed bed batch type gasifier [Elektronisk resurs]. *Materials Sci. Fuel* [Internet]. Elsevier Ltd; 2021;292:120310. Available from: <https://doi.org/10.1016/j.fuel.2021.120310>
- [35] Sikarwar VS, Zhao M. Biomass Gasification [Internet]. *Encyclopedia of Sustainable Technologies*. Elsevier; 2017. Available from: <http://dx.doi.org/10.1016/B978-0-12-409548-9.10533-0>
- [36] Slivka RM, Chinn MS, Grunden AM. Gasification and synthesis gas fermentation: An alternative route to biofuel production. *Biofuels*. 2011;2:405–19.
- [37] Lucas C. High temperature air/steam gasification of biomass in an updraft fixed bed batch type gasifier [Elektronisk resurs]. *Materials science*. 2005;9–25.
- [38] Chopra S, Jain A. A review of fixed bed gasification systems for biomass. *Agricultural Engineering International: CIGR ...* [Internet]. 2007;IX:1–23. Available from: <http://cigrjournal.org/index.php/Ejournal/article/view/960/954>
- [39] Swanson RM, Platon A, Satrio JA, Brown RC. Techno-economic analysis of biomass-to-liquids production based on gasification. *Fuel* [Internet]. Elsevier Ltd; 2010;89:S11–9. Available from: <http://dx.doi.org/10.1016/j.fuel.2010.07.027>
- [40] Devi L, Ptasinski KJ, Janssen FJJG. A review of the primary measures for tar elimination in biomass gasification processes. *Biomass Bioenergy*. 2003;24:125–40.

-
- [41] Wu C zhi, Yin X li, Ma L long, Zhou Z qiu, Chen H ping. Operational characteristics of a 1.2-MW biomass gasification and power generation plant. *Biotechnol Adv* [Internet]. Elsevier Inc.; 2009;27:588–92. Available from: <http://dx.doi.org/10.1016/j.biotechadv.2009.04.020>
- [42] Kumar A, Jones DD, Hanna MA. Thermochemical biomass gasification: A review of the current status of the technology. *Energies* (Basel). 2009;2:556–81.
- [43] Paethanom A, Nakahara S, Kobayashi M, Prawisudha P, Yoshikawa K. Performance of tar removal by absorption and adsorption for biomass gasification. *Fuel Processing Technology* [Internet]. Elsevier B.V.; 2012;104:144–54. Available from: <http://dx.doi.org/10.1016/j.fuproc.2012.05.006>
- [44] Carvalho MMO, Cardoso M, Vakkilainen EK. Biomass gasification for natural gas substitution in iron ore pelletizing plants. *Renew Energy* [Internet]. Elsevier Ltd; 2015;81:566–77. Available from: <http://dx.doi.org/10.1016/j.renene.2015.03.056>
- [45] Li XT, Grace JR, Lim CJ, Watkinson AP, Chen HP, Kim JR. Biomass gasification in a circulating fluidized bed. *Biomass Bioenergy*. 2004;26:171–93.
- [46] Zhang K, Chang J, Guan Y, Chen H, Yang Y, Jiang J. Lignocellulosic biomass gasification technology in China. *Renew Energy* [Internet]. Elsevier Ltd; 2013;49:175–84. Available from: <http://dx.doi.org/10.1016/j.renene.2012.01.037>
- [47] Pedroso DT, Aiello RC, Conti L, Mascia S. Biomass gasification on a new really tar free downdraft gasifier. *Revista Ciencias Exatas*. 2005;11:59–62.
- [48] Munasinghe PC, Khanal SK. Syngas fermentation to biofuel: Evaluation of carbon monoxide mass transfer coefficient (kLa) in different reactor configurations. *Biotechnol Prog*. 2010;26:1616–21.
- [49] Phillips JR, Huhnke RL, Atiyeh HK. Syngas fermentation: A microbial conversion process of gaseous substrates to various products. *Fermentation*. 2017;3.
- [50] Köpke M, Held C, Hujer S, Liesegang H, Wiezer A, Wollherr A, et al. *Clostridium ljungdahlii* represents a microbial production platform based on syngas. *Proc Natl Acad Sci U S A*. 2010;107:13087–92.
- [51] Devarapalli M, Atiyeh HK. A review of conversion processes for bioethanol production with a focus on syngas fermentation. *Biofuel Research Journal*. Green Wave Publishing of Canada; 2015. p. 268–80.
- [52] Kundiyana DK, Huhnke RL, Wilkins MR. Syngas fermentation in a 100-L pilot scale fermentor: Design and process considerations. *J Biosci Bioeng* [Internet]. The Society for Biotechnology, Japan; 2010;109:492–8. Available from: <http://dx.doi.org/10.1016/j.jbiosc.2009.10.022>
- [53] Maddipati P, Atiyeh HK, Bellmer DD, Huhnke RL. Ethanol production from syngas by *Clostridium* strain P11 using corn steep liquor as a nutrient replacement to yeast extract. *Bioresour Technol* [Internet]. Elsevier Ltd; 2011;102:6494–501. Available from: <http://dx.doi.org/10.1016/j.biortech.2011.03.047>
- [54] Sun X, Atiyeh HK, Huhnke RL, Tanner RS. Syngas fermentation process development for production of biofuels and chemicals: A review. *Bioresour Technol Rep* [Internet]. Elsevier; 2019;7:100279. Available from: <https://doi.org/10.1016/j.biteb.2019.100279>
- [55] Anggraini ID, Keryanti, Kresnowati MTAP, Purwadi R, Noda R, Watanabe T, et al. Bioethanol production via syngas fermentation of *Clostridium ljungdahlii* in a hollow fiber membrane supported bioreactor. *International Journal of Technology*. Faculty of Engineering, Universitas Indonesia; 2019;10:481–90.
- [56] Abubackar HN, Veiga MC, Kennes C. Biological conversion of carbon monoxide: Rich syngas or waste gases to bioethanol. *Biofuels, Bioproducts and Biorefining*. 2011. p. 93–114.

-
- [57] Francois J, Abdelouahed L, Mauviel G, Patisson F, Mirgaux O, Rogaume C, et al. Detailed process modeling of a wood gasification combined heat and power plant. *Biomass Bioenergy* [Internet]. Elsevier Ltd; 2013;51:68–82. Available from: <http://dx.doi.org/10.1016/j.biombioe.2013.01.004>
- [58] Mohammadi M, Najafpour GD, Younesi H, Lahijani P, Uzir MH, Mohamed AR. Bioconversion of synthesis gas to second generation biofuels: A review. *Renewable and Sustainable Energy Reviews* [Internet]. Elsevier Ltd; 2011;15:4255–73. Available from: <http://dx.doi.org/10.1016/j.rser.2011.07.124>
- [59] Ragsdale SW, Pierce E. Acetogenesis and the Wood-Ljungdahl pathway of CO₂ fixation. *Biochim Biophys Acta Proteins Proteom*. 2008. p. 1873–98.
- [60] Köpke M, Mihalcea C, Bromley JC, Simpson SD. Fermentative production of ethanol from carbon monoxide. *Curr Opin Biotechnol*. 2011;22:320–5.
- [61] Humphreys CM, Minton NP. Advances in metabolic engineering in the microbial production of fuels and chemicals from C₁ gas. *Curr Opin Biotechnol* [Internet]. Elsevier Ltd; 2018;50:174–81. Available from: <http://dx.doi.org/10.1016/j.copbio.2017.12.023>
- [62] Henstra AM, Sipma J, Rinzema A, Stams AJ. Microbiology of synthesis gas fermentation for biofuel production. *Curr Opin Biotechnol*. 2007;18:200–6.
- [63] Sun X, Atiyeh HK, Huhnke RL, Tanner RS. Syngas fermentation process development for production of biofuels and chemicals: A review. *Bioresour Technol Rep* [Internet]. Elsevier Ltd; 2019; 7:100279. Available from: <https://doi.org/10.1016/j.biteb.2019.100279>
- [64] Tanner RS, Miller LM, Yang D. *Clostridium ljungdahlii* sp. nov., an acetogenic species in clostridial rRNA homology group I. *Int J Syst Bacteriol*. 1993;43:232–6.
- [65] Liu K, Atiyeh HK, Tanner RS, Wilkins MR, Huhnke RL. Fermentative production of ethanol from syngas using novel moderately alkaliphilic strains of *Alkalibaculum bacchi*. *Bioresour Technol* [Internet]. Elsevier Ltd; 2012;104:336–41. Available from: <http://dx.doi.org/10.1016/j.biortech.2011.10.054>
- [66] Shen Y. Attached-growth bioreactors for syngas fermentation to biofuel. Graduate Theses and Dissertation Paper 13645 Iowa State University, USA. 2013;143.
- [67] Shen Y, Brown R, Wen Z. Syngas fermentation of *Clostridium carboxidivoran* P7 in a hollow fiber membrane biofilm reactor: Evaluating the mass transfer coefficient and ethanol production performance. *Biochem Eng J* [Internet]. Elsevier B.V.; 2014;85:21–9. Available from: <http://dx.doi.org/10.1016/j.bej.2014.01.010>
- [68] Srivastava N, Rawat R, Singh Oberoi H, Ramteke PW. A review on fuel ethanol production from lignocellulosic biomass. *Int J Green Energy*. 2015;12:949–60.
- [69] Mohammadi M, Najafpour GD, Younesi H, Lahijani P, Uzir MH, Mohamed AR. Bioconversion of synthesis gas to second generation biofuels: A review. *Renewable and Sustainable Energy Reviews* [Internet]. Elsevier Ltd; 2011;15:4255–73. Available from: <http://dx.doi.org/10.1016/j.rser.2011.07.124>
- [70] Johnstone AH. CRC Handbook of Chemistry and Physics-69th Edition Editor in Chief R. C. Weast, CRC Press Inc., Boca Raton, Florida, 1988, pp. 2400, price £57.50. ISBN 0-8493-0369-5. *Journal of Chemical Technology & Biotechnology*. 2007;50:294–5.
- [71] Moutafchieva D, Popova D, Dimitrova M, Tchaoushev S. Experimental determination of the volumetric mass transfer coefficient. *Journal of the University of Chemical Technology and Metallurgy*. 2013;48:351–6.
- [72] Krista GM, Kresnowati MTAP. Modeling the synthetic gas fermentation for bioethanol production. *IOP Conf Ser Earth Environ Sci*. 2022;963.
- [73] Keryanti, Kresnowati MTAP, Setiadi T. Evaluation of gas mass transfer in reactor for syngas fermentation. *AIP Conf Proc*. American Institute of Physics Inc.; 2019.

-
- [74] Datar RP, Shenkman RM, Cateni BG, Huhnke RL, Lewis RS. Fermentation of biomass-generated producer gas to ethanol. *Biotechnol Bioeng*. 2004;86:587–94.
- [75] Ahmed A, Cateni BG, Huhnke RL, Lewis RS. Effects of biomass-generated producer gas constituents on cell growth, product distribution and hydrogenase activity of *Clostridium carboxidivorans* P7T. *Biomass Bioenergy*. 2006;30:665–72.
- [76] Monir MU, Aziz AA, Khatun F, Yousuf A. Bioethanol production through syngas fermentation in a tar free bioreactor using *Clostridium butyricum*. *Renew Energy* [Internet]. Elsevier Ltd; 2020;157:1116–23. Available from: <https://doi.org/10.1016/j.renene.2020.05.099>
- [77] Ciferno JP, Marano JJ. Benchmarking biomass gasification technologies for fuels, chemicals and hydrogen production. US Department of Energy National Energy [Internet]. 2002;58. Available from: <http://seca.doe.gov/technologies/coalpower/gasification/pubs/pdf/BMassGasFinal.pdf>
- [78] Ahmed, A and Lewis RS. Fermentation of Biomass-Generated Synthesis Gas: Effect of Nitric Acid. 2007;
- [79] Xu D, Lewis RS. Syngas fermentation to biofuels: Effects of ammonia impurity in raw syngas on hydrogenase activity. *Biomass Bioenergy* [Internet]. Elsevier Ltd; 2012;45:303–10. Available from: <http://dx.doi.org/10.1016/j.biombioe.2012.06.022>
- [80] Infantes A, Kugel M, Raffelt K, Neumann A. Side-by-side comparison of clean and biomass-derived, impurity-containing syngas as substrate for acetogenic fermentation with *Clostridium ljungdahlii*. *Fermentation*. 2020.
- [81] Doll K, Rückel A, Kämpf P, Wende M, Weuster-Botz D. Two stirred-tank bioreactors in series enable continuous production of alcohols from carbon monoxide with *Clostridium carboxidivorans*. *Bioprocess Biosyst Eng* [Internet]. Springer Berlin Heidelberg; 2018;41:1403–16. Available from: <http://dx.doi.org/10.1007/s00449-018-1969-1>
- [82] Liakakou ET, Infantes A, Neumann A, Vreugdenhil BJ. Connecting gasification with syngas fermentation: Comparison of the performance of lignin and beech wood. *Fuel* [Internet]. Elsevier Ltd; 2021;290:120054. Available from: <https://doi.org/10.1016/j.fuel.2020.120054>
- [83] Jack J, Lo J, Maness PC, Ren ZJ. Directing *Clostridium ljungdahlii* fermentation products via hydrogen to carbon monoxide ratio in syngas. *Biomass Bioenergy* [Internet]. Elsevier Ltd; 2019;124:95–101. Available from: <https://doi.org/10.1016/j.biombioe.2019.03.011>
- [84] Lanzillo F, Ruggiero G, Raganati F, Russo ME, Marzocchella A. Batch syngas fermentation by *Clostridium carboxidivorans* for production of acids and alcohols. *Processes*. 2020;8:1–13.
- [85] He Y, Kennes C, Lens PNL. Enhanced solventogenesis in syngas bioconversion: Role of process parameters and thermodynamics. *Chemosphere* [Internet]. Elsevier Ltd; 2022; 299: 134425. Available from: <https://doi.org/10.1016/j.chemosphere.2022.134425>
- [86] Hermann M, Teleki A, Weitz S, Niess A, Freund A, Bengelsdorf FR, et al. Electron availability in CO₂, CO and H₂ mixtures constrains flux distribution, energy management and product formation in *Clostridium ljungdahlii*. *Microb Biotechnol*. 2020;13:1831–46.